


CATENE A PIASTRE DIRITTE

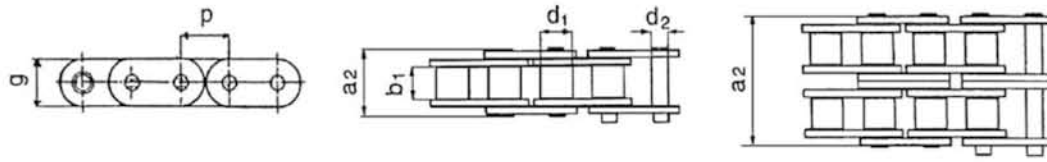

A PIASTRE DIRITTE

| ISO N. | mm | p | inch | b ₁ min. mm | d ₂ mm | d ₁ max. mm | a ² max. mm | g max. mm | f cm ² | kg/m = | caric. roff. N. min. |
|--------|--------|---|------|---------------------------|----------------------|---------------------------|---------------------------|--------------|----------------------|-----------|----------------------------|
| 08B-1 | 12.7 | | 1/2" | 7.75 | 4.45 | 8.51 | 17.0 | 11.81 | 0.50 | 0.80 | 17.000 |
| 10B-1 | 15.875 | | 5/8" | 9.65 | 5.08 | 10.16 | 19.6 | 14.73 | 0.67 | 1.00 | 22.000 |
| 12B-1 | 19.05 | | 3/4" | 11.68 | 5.72 | 12.07 | 22.7 | 16.13 | 0.89 | 1.30 | 28.000 |
| 16B-1 | 25.4 | | 1" | 17.02 | 8.28 | 15.88 | 36.1 | 21.08 | 2.10 | 2.90 | 57.000 |
| 12B-2 | 19.05 | | 3/4" | 11.68 | 5.72 | 12.07 | 42.2 | 16.13 | 1.78 | 2.60 | 60.000 |